

KuBank3.0

C&I Energy Storage System

S-836-2h-IEC

Capacity: 836 kWh

KuBank3.0 is a modular, flexible and cost-effective kWh-scale battery energy storage system. Multiple units can be connected in parallel. This product is designed to meet energy storage needs for today and for the future.

KEY FEATURES

- Cost-effective and long service life
- Integrated, modular design, adapt to different application scenarios, convenient installation and commissioning
- Active balancing BMS on pack and rack level, with 2A balance current help to release more energy and extends the lifespan
- Liquid cooling technology with cell temperatures being controlled within the optimal operating range, temperature difference < 3℃
- Battery pack IP67 seal grade avoids dust, moisture, and water condensation
- Multi-stage thermal spread technology, effectively prevents battery heat spread and improves safety
- Multi-level fire detection monitors early thermal runaway of cells
- Built-in peak shaving, demand management and other operational control modes

Certificates

IEC62477, IEC62619, IEC63056, UN38.3, IEC61000-6-4, IEC61000-6-2, EU Battery Regulation (2023/1542), RoHS, REACH, POPs

*The specific certificates applicable to each market, and not all certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates applicable in the regions in which the products will be used.


CSI Solar Co., Ltd. is committed to providing high quality solar photovoltaic modules, solar energy and battery storage solutions to customers. The company was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey. Over the past 25 years, it has successfully delivered over 174 GW of premium-quality solar modules across the world.

As a part of Canadian Solar, we recognize the crucial role of battery storage systems in achieving a sustainable future. We offer a suite of proven, flexible, turnkey energy storage solutions, providing our clients with a streamlined and efficient experience. Our team of experienced engineers and project managers is focused to ensure the best overall value for each project, through advanced technology and system flexibility while backed by our experience, bankability, coverage, and commitment to providing the highest level of support, quality, safety, and superior performance.

CSI Energy Storage Co., Ltd.
4273 King Street East, Suite 102 | Kitchener, Ontario, N2P 2E9, Canada| www.csisolar.com, support@csisolar.com



CIRCUIT DIAGRAM

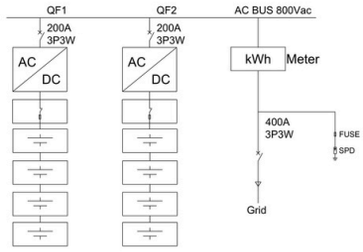

SYSTEM PARAMETER

DC Parameters	
Product Name	CSI-KuBank-S-836-2h-IEC
Battery Chemistry	Lithium Iron Phosphate (LFP)
Cell Capacity	314 Ah
Pack Configuration	1P104S (104 Cells)
System Configuration	2* (4*1P104S)
DC Voltage (Nominal)	1331.2 V
DC Voltage Range	1164.8 V ~1497.6 V
Nominal Energy Capacity	836 kWh
Max. Cluster DC Power	209kW
AC Parameters	
Nominal AC Power	418 kW
Nominal AC voltage	800Vac
AC voltage range	680 to 880 Vac
Nominal grid frequency	50/60 Hz
THD	＜3%
Power Factor	-1 ~ 1,continuously adjustable
General	
Duration @Rated Power	2/4 h
Max. AC Round Trip Efficiency	90%
Control Backup	2-hrs UPS for control system including BMS, installed in the cabinet
AC auxiliary power input	3P+N+PE at 400Vac
Operating Temperature (Ambient)	-30 °C to 55 °C
Relative Humidity	≤95% (non-condensing)
Communication Interface	Ethernet / RS485 / CAN
Communication Protocol	Modbus TCP / Modbus RTU / CAN 2.0
Certifications	IEC62477, IEC62619, IEC63056, UN38.3, IEC61000-6-4, IEC61000-6-2, EU Battery Regulation (2023/1542), RoHS, REACH, POPs
Enclosure	Non-standard sheet metal
Dimensions (W*H*D)	2000*2480*2500 mm
Weight (Battery Included)	≤9,000kg
Altitude	< 2000 m (derating between 2000 m ~ 4000 m)
Enclosure Ingress Rating	IP54
Painting/Coating	RAL9003
Seismic Parameter	Zone 4
Noise @1m distance	≤ 75 dB
Fire Detection and Alarm	Combustible gas detection and smoke detection, Sound and Strobe alarm, Deflagration panel
Fire Suppression	Aerosol-based fire suppression system ， Dry pipe sprinkler system(optional)

* The technical parameters contained in this technical data document may deviate slightly, and Canadian Solar does not guarantee that they are completely accurate. Due to continuous innovation, research and development and product improvement, Canadian Solar reserves the right to adjust the information in this technical parameter document at any time without prior notice. The customer should obtain the latest version of the technical parameter document when signing the contract and make it an integral part of the binding contract signed by both parties.

CSI Energy Storage Co., Ltd.
4273 King Street East, Suite 102 | Kitchener, Ontario, N2P 2E9, Canada| www.csisolar.com, support@csisolar.com