



## Old Module Replacement

# KuPower Mono PERC 330 W ~ 355 W

CS6X-330 | 335 | 340 | 345 | 350 | 355P-PLUS (IEC1000 V)

CS6X-330 | 335 | 340 | 345 | 350 | 355P-PLUS (IEC1500 V)

Perfect Size to Replace 6" 72 Cell Module  
Excellent Electrical Compatibility



Module size 1954 x 982 mm  
Perfect size to replace 6" 72 cell module




Single module replacement possible



Minimize BoS cost for module replacement



Can be used to replace other brand 6" 72 cell module

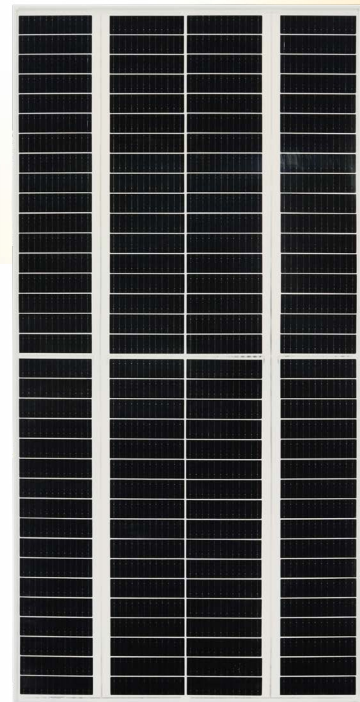

**Enhanced Product Warranty on Materials and Workmanship\***



**Linear Power Performance Warranty\***

\*According to the applicable Canadian Solar Limited Warranty Statement. For detailed information, please contact your local Canadian Solar sales and technical representatives.

## Enhanced Energy Yield and Product Reliability



Low power loss in cell connection



Better shading tolerance



Minimizes micro-crack impacts



Heavy snow load up to 5400 Pa,  
enhanced wind load up to 2400 Pa\*\*

### MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001:2015 / Quality management system  
ISO 14001:2015 / Standards for environmental management system  
ISO 45001: 2018 / International standards for occupational health & safety

### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730 (pending)

\* The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates available for your product and applicable in the regions in which the products will be used.


**CSI Solar Co., Ltd.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. Canadian Solar was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey, and is a leading PV project developer and manufacturer of solar modules, with over 55 GW deployed around the world since 2001.

\* For detailed information, please contact your local Canadian Solar sales and technical representatives.


\*\* For detailed information, please refer to the Installation Manual.

## ENGINEERING DRAWING (mm)

### Rear View

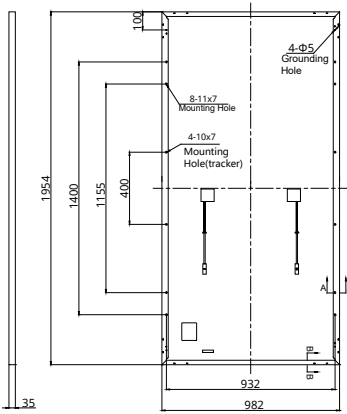


### Frame Cross Section

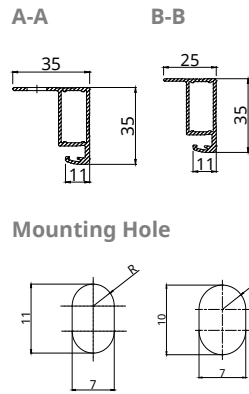

### Mounting Hole

## CS6X-330P-PLUS / I-V CURVES

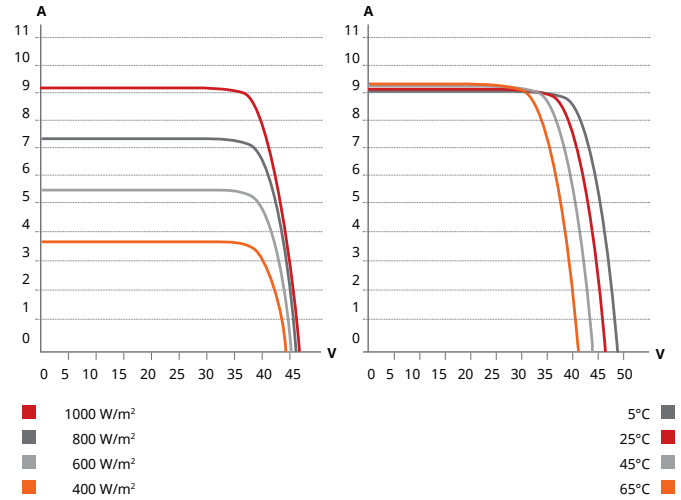

## ELECTRICAL DATA | STC\*

### CS6X-330/335/340/345/350/355P-PLUS

|                              | 330 W  | 335 W  | 340 W  | 345 W  | 350 W  | 355 W  |
|------------------------------|--|--------|--------|--------|--------|--------|
| Nominal Max. Power (Pmax)    | 330 W  | 335 W  | 340 W  | 345 W  | 350 W  | 355 W  |
| Opt. Operating Voltage (Vmp) | 38.7 V   | 38.9 V | 39.1 V | 39.3 V | 39.5 V | 39.7 V |
| Opt. Operating Current (Imp) | 8.54 A   | 8.62 A | 8.71 A | 8.79 A | 8.87 A | 8.95 A |
| Open Circuit Voltage (Voc)   | 46.1 V   | 46.3 V | 46.5 V | 46.7 V | 46.9 V | 47.1 V |
| Short Circuit Current (Isc)  | 9.17 A   | 9.23 A | 9.29 A | 9.35 A | 9.40 A | 9.47 A |
| Module Efficiency            | 17.2%  | 17.5%  | 17.7%  | 18.0%  | 18.2%  | 18.5%  |
| Operating Temperature        | -40°C ~ +85°C  |        |        |        |        |        |
| Max. System Voltage          | 1000V (IEC/UL) or 1500V (IEC/UL)   |        |        |        |        |        |
| Module Fire Performance      | TYPE 1 (UL 61730 1500V) or TYPE 2 (UL61730 1000V) or Class C (IEC 61730) |        |        |        |        |        |
| Max. Series Fuse Rating      | 20 A   |        |        |        |        |        |
| Application Classification   | Class A  |        |        |        |        |        |
| Power Tolerance              | 0 ~ + 5 W  |        |        |        |        |        |

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3% (Pmax).

## ELECTRICAL DATA | NMOT\*

### CS6X-330/335/340/345/350/355P-PLUS

|                              | 248 W  | 251 W  | 255 W  | 259 W  | 263 W  | 266 W  |
|------------------------------|--------|--------|--------|--------|--------|--------|
| Nominal Max. Power (Pmax)    | 248 W  | 251 W  | 255 W  | 259 W  | 263 W  | 266 W  |
| Opt. Operating Voltage (Vmp) | 36.3 V | 36.5 V | 36.7 V | 36.8 V | 37.0 V | 37.2 V |
| Opt. Operating Current (Imp) | 6.82 A | 6.89 A | 6.96 A | 7.02 A | 7.09 A | 7.16 A |
| Open Circuit Voltage (Voc)   | 43.6 V | 43.8 V | 44.0 V | 44.1 V | 44.3 V | 44.5 V |
| Short Circuit Current (Isc)  | 7.40 A | 7.45 A | 7.49 A | 7.54 A | 7.58 A | 7.64 A |

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup> spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## MECHANICAL DATA

| Specification                      | Data  |
|------------------------------------|---|
| Cell Type                          | Mono-crystalline  |
| Cell Arrangement                   | 136 [4 X (17 X 2)]  |
| Dimensions                         | 1954 X 982 X 35 mm<br>(76.9 X 38.7 X 1.38 in)   |
| Weight                             | 21.0 kg (46.3 lbs)  |
| Front Cover                        | 3.2 mm tempered glass   |
| Frame                              | Anodized aluminium alloy  |
| J-Box                              | IP68, 4 bypass diodes   |
| Cable                              | 4.0 mm <sup>2</sup> (IEC), 12 AWG (UL)  |
| Cable Length (Including Connector) | Portrait: 400 mm (15.7 in) (+) / 280 mm (11.0 in) (-) (supply additional cable jumper: 2 lines/pallet); landscape: 1400 mm (55.1 in)* |
| Connector                          | PV-KST4/xy-UR, PV-KBT4/xy-UR (IEC 1000 V) or T4-PC-1 (IEC 1500 V) or PV-KST4-EVO2/XY, PV-KBT4-EVO2/XY (IEC 1500 V)                    |
| Per Pallet                         | 30 pieces   |
| Per Container (40' HQ)             | 720 pieces  |

\* For detailed information, please contact your local Canadian Solar sales and technical representatives.

## TEMPERATURE CHARACTERISTICS

| Specification                        | Data         |
|--------------------------------------|--------------|
| Temperature Coefficient (Pmax)       | -0.34 % / °C |
| Temperature Coefficient (Voc)        | -0.26 % / °C |
| Temperature Coefficient (Isc)        | 0.05 % / °C  |
| Nominal Module Operating Temperature | 41 ± 3°C     |

## PARTNER SECTION



\* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without further notice.

Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

## Canadian Solar MSS (Australia) Pty Ltd.

44 Stephenson St, Cremorne VIC 3121, Australia, sales.au@csisolar.com, www.csisolar.com/au