




N-type Module

TOPHiKu6

CS6.2-48TM-460 | 465 | 470 | 475 | 480 | 485 | 490 (IEC1500V)

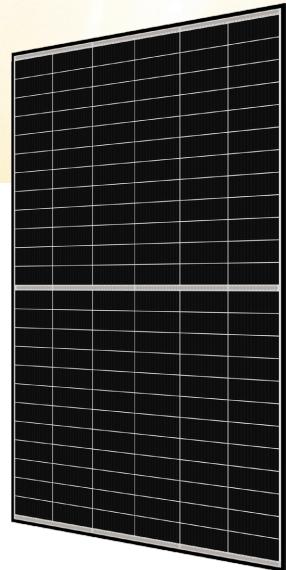

MORE POWER



Module power up to 490 W
Module efficiency up to 24.5 %



Excellent anti-LeTID & anti-PID performance.
Low power degradation, high energy yield



Lower temperature coefficient (Pmax): -0.29%/°C,
increases energy yield in hot climate



Lower LCOE & system cost

MORE RELIABLE



Tested up to ice ball of 45 mm diameter
according to IEC 61215 standard



Minimizes micro-crack impacts



Heavy snow load up to 5400 Pa,
wind load up to 2400 Pa*



Industry Leading Product Warranty on Materials
and Workmanship*



Linear Power Performance Warranty*

1st year power degradation no more than 1%
Subsequent annual power degradation no more than 0.4%

*According to the applicable Canadian Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES*

ISO 9001: 2015 / Quality management system
ISO 14001: 2015 / Standards for environmental management system
ISO 45001: 2018 / International standards for occupational health & safety
IEC 62941: 2019 / Photovoltaic module manufacturing quality system

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730
IEC 61701 / IEC 62716



* The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates available for your Product and applicable in the regions in which the products will be used.

CSI Solar Co., Ltd., a BNEF Tier 1 and S&P Global Tier 1 module manufacturer, is a leading provider of integrated solar and energy storage solutions. With over 24 years of expertise, the company has delivered more than 165 GW of premium-quality solar modules worldwide.


* For detailed information, please refer to the Installation Manual.

Canadian Solar MSS (Australia) Pty Ltd.


Level 27, 101 Collins Street, Melbourne VIC 3000, Australia, sales.au@csisolar.com, www.csisolar.com.au

ENGINEERING DRAWING (mm)


Rear View

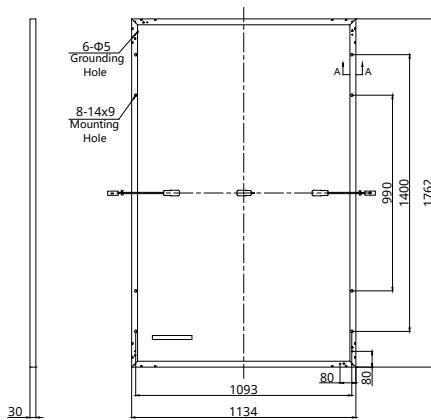


Frame Cross Section A-A



Mounting Hole



CS6.2-48TM-470 (IEC1500V) / I-V CURVES

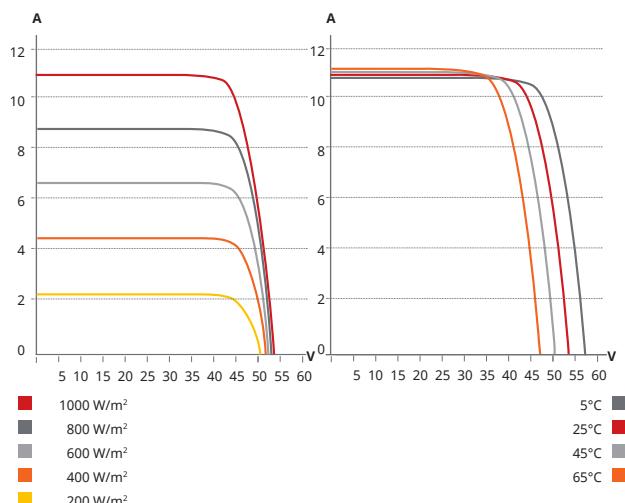

ELECTRICAL DATA (STC*) | CS6.2-48TM-xxx (IEC1500V) (xxx=460-490)

	460	465	470	475	480	485	490
Nominal Max. Power (Pmax)	460 W	465 W	470 W	475 W	480 W	485 W	490 W
Opt. Operating Voltage (Vmp)	45.2 V	45.4 V	45.6 V	45.8 V	46.0 V	46.2 V	46.4 V
Opt. Operating Current (Imp)	10.18 A	10.25 A	10.32 A	10.39 A	10.45 A	10.51 A	10.58 A
Open Circuit Voltage (Voc)	53.3 V	53.5 V	53.7 V	53.9 V	54.3 V	54.5 V	54.7 V
Short Circuit Current (Isc)	10.82 A	10.89 A	10.96 A	11.03 A	11.10 A	11.17 A	11.24 A
Module Efficiency	23.0%	23.3%	23.5%	23.8%	24.0%	24.3%	24.5%
Operating Temperature	-40°C ~ +85°C						
Module (T98)max	70°C						
Max. System Voltage	1500V (IEC/UL)						
Module Fire Performance	TYPE 1 (UL 61730 1500V) or TYPE 2 (UL 61730 1000V) or CLASS C (IEC 61730)						
Max. Series Fuse Rating	20 A						
Protection Class	Class II						
Power Tolerance	-5 W ~ +10 W						

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3 % (Pmax), ±5% (Voc, Isc).

ELECTRICAL DATA (NMOT*) | CS6.2-48TM-xxx (IEC1500V) (xxx=460-490)

	460	465	470	475	480	485	490
Nominal Max. Power (Pmax)	348 W	352 W	356 W	359 W	363 W	367 W	371 W
Opt. Operating Voltage (Vmp)	42.7 V	42.9 V	43.1 V	43.3 V	43.5 V	43.7 V	43.9 V
Opt. Operating Current (Imp)	8.14 A	8.20 A	8.25 A	8.30 A	8.35 A	8.40 A	8.45 A
Open Circuit Voltage (Voc)	50.5 V	50.7 V	50.8 V	51.0 V	51.4 V	51.6 V	51.8 V
Short Circuit Current (Isc)	8.72 A	8.77 A	8.83 A	8.89 A	8.94 A	9.00 A	9.06 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

MECHANICAL DATA

Specification	Data
Cell Type	TOPCon cells
Cell Arrangement	144 [2 x (12 x 6)]
Dimensions	1762 x 1134 x 30 mm (69.4 x 44.6 x 1.18 in)
Weight	21.3 kg (47.0 lbs)
Front Glass	3.2 mm tempered glass with anti-reflective coating
Frame	Anodized aluminium alloy
J-Box	IP68, 3 bypass diodes
Cable	4 mm² (IEC), 12 AWG (UL)
Cable Length (Including Connector)	Portrait: 300 mm (11.8 in) (+) / 200 mm (7.9 in) (-); landscape: 1100 mm (43.3 in)*
Connector	Tlian: T6 Stäubli: PV-KST4-EVO2A/6I, PV-KBT4-EVO2A/6I
Per Pallet	36 pieces
Per Container (40' HQ)	936 pieces

* For detailed information, please contact your local Canadian Solar sales and technical representatives.

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.29 % / °C
Temperature Coefficient (Voc)	-0.25 % / °C
Temperature Coefficient (Isc)	0.045 % / °C
Nominal Module Operating Temperature	41 ± 3°C

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

PARTNER SECTION

