




Low Carbon Module

HiHero+ Bifacial HJT

CS6.2-66HB-620 | 625 | 630 | 635 | 640 | 645 (IEC1500V)

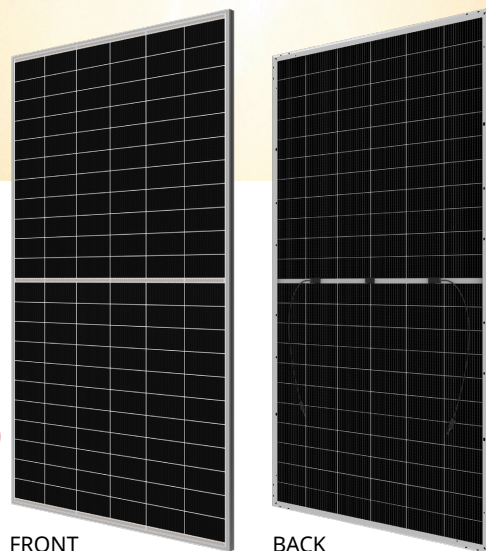

MORE POWER



Module power up to 645 W
Module efficiency up to 23.9 %



Up to 95% Power Bifaciality,
more power from the back side



No B-O LID, excellent anti-LeTID & anti-PID
performance. Low power degradation,
high energy yield



Leading temperature coefficient (Pmax): -0.24%/°C,
increases energy yield in hot climate



Lower energy consumption & carbon emissions,
shorter carbon payback time

MORE RELIABLE



Tested up to ice ball of 35 mm diameter
according to IEC 61215 standard



Minimizes micro-crack impacts



Heavy snow load up to 5400 Pa,
enhanced wind load up to 2400 Pa*



**Industry Leading Product Warranty on
Materials and Workmanship***



Linear Power Performance Warranty*

**1st year power degradation no more than 1%
Subsequent annual power degradation no more than 0.3%**

*According to the applicable Canadian Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES*

ISO 9001: 2015 / Quality management system
ISO 14001: 2015 / Standards for environmental management system
ISO 45001: 2018 / International standards for occupational health & safety
IEC 62941: 2019 / Photovoltaic module manufacturing quality system

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730 / CE / UKCA / INMETRO / CGC
UL 61730 / IEC 61701 / IEC 62716 / IEC 60068-2-68
UNI 9177 Reaction to Fire: Class 1 / Take-e-way



* The specific certificates applicable to different module types and markets will vary,
and therefore not all of the certifications listed herein will simultaneously apply to the
products you order or use. Please contact your local Canadian Solar sales representative
to confirm the specific certificates available for your Product and applicable in the regions
in which the products will be used.

CSI Solar Co., Ltd. is committed to providing high quality solar photovoltaic modules, solar energy and battery storage solutions to customers. The company was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey. Over the past 24 years, it has successfully delivered over 150 GW of premium-quality solar modules across the world.


* For detailed information, please refer to the Installation Manual.

Canadian Solar MSS (Australia) Pty Ltd.


Level 27, 101 Collins Street, Melbourne VIC 3000, Australia, sales.au@csisolar.com, www.csisolar.com/au

ENGINEERING DRAWING (mm)


Rear View

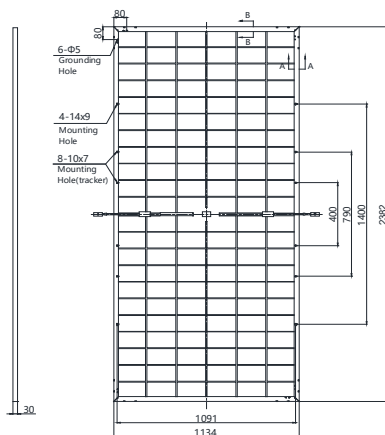

Frame Cross Section

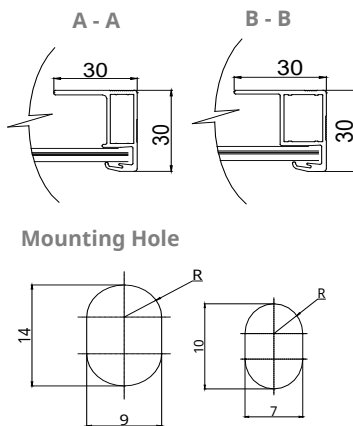

CS6.2-66HB-635 / I-V CURVES

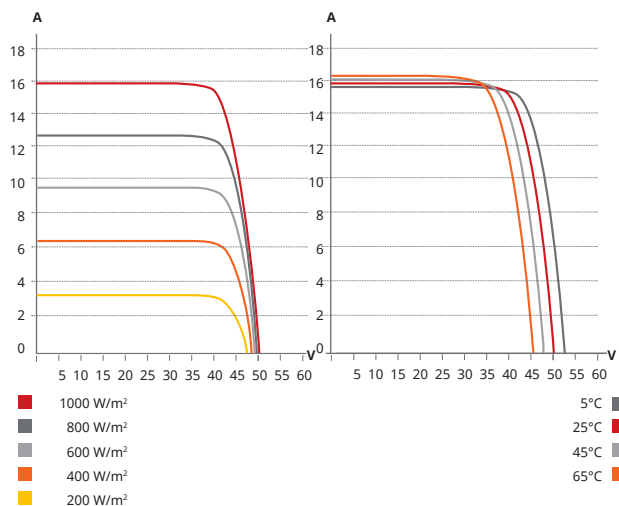

ELECTRICAL DATA | STC*

		Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)	Module Efficiency
CS6.2-66HB-620		620 W	42.6 V	14.58 A	50.1 V	15.65 A	23.0%
	Bifacial Gain**	5%	651 W	42.6 V	15.31 A	50.1 V	24.1%
		10%	682 W	42.6 V	16.04 A	50.1 V	25.2%
		20%	744 W	42.6 V	17.50 A	50.1 V	27.5%
CS6.2-66HB-625		625 W	42.6 V	14.69 A	50.1 V	15.75 A	23.1%
	Bifacial Gain**	5%	656 W	42.6 V	15.42 A	50.1 V	24.3%
		10%	688 W	42.6 V	16.16 A	50.1 V	25.5%
		20%	750 W	42.6 V	17.63 A	50.1 V	27.8%
CS6.2-66HB-630		630 W	42.6 V	14.79 A	50.2 V	15.82 A	23.3%
	Bifacial Gain**	5%	662 W	42.6 V	15.53 A	50.2 V	24.5%
		10%	693 W	42.6 V	16.27 A	50.2 V	25.7%
		20%	756 W	42.6 V	17.75 A	50.2 V	28.0%
CS6.2-66HB-635		635 W	42.7 V	14.88 A	50.3 V	15.92 A	23.5%
	Bifacial Gain**	5%	667 W	42.7 V	15.62 A	50.3 V	24.7%
		10%	699 W	42.7 V	16.37 A	50.3 V	25.9%
		20%	762 W	42.7 V	17.86 A	50.3 V	28.2%
CS6.2-66HB-640		640 W	42.7 V	14.99 A	50.4 V	16.01 A	23.7%
	Bifacial Gain**	5%	672 W	42.7 V	15.74 A	50.4 V	24.9%
		10%	704 W	42.7 V	16.49 A	50.4 V	26.1%
		20%	768 W	42.7 V	17.99 A	50.4 V	28.4%
CS6.2-66HB-645		645 W	42.8 V	15.07 A	50.4 V	16.13 A	23.9%
	Bifacial Gain**	5%	677 W	42.8 V	15.82 A	50.4 V	25.1%
		10%	710 W	42.8 V	16.58 A	50.4 V	26.3%
		20%	774 W	42.8 V	18.08 A	50.4 V	28.7%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3 % (Pmax).

** Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA | NMOT*

	Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)
CS6.2-66HB-620	473 W	40.6 V	11.65 A	47.6 V	12.62 A
CS6.2-66HB-625	477 W	40.6 V	11.74 A	47.6 V	12.70 A
CS6.2-66HB-630	481 W	40.6 V	11.83 A	47.7 V	12.76 A
CS6.2-66HB-635	484 W	40.7 V	11.90 A	47.8 V	12.84 A
CS6.2-66HB-640	488 W	40.7 V	11.99 A	47.9 V	12.91 A
CS6.2-66HB-645	492 W	40.8 V	12.06 A	47.9 V	13.01 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

MECHANICAL DATA

Specification	Data
Cell Type	HJT cells
Cell Arrangement	132 [2 x (11 x 6)]
Dimensions	2382 x 1134 x 30 mm (93.8 x 44.6 x 1.18 in)
Weight	32.8 kg (72.3 lbs)
Front Glass	2.0 mm heat strengthened glass with anti-reflective coating
Back Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 bypass diodes
Cable	4.0 mm² (IEC), 12 AWG (UL)
Cable Length (Including Connector)	300 mm (11.8 in) (+) / 200 mm (7.9 in) (-) or customized length*
Connector	Tlian: T6 Stäubli: PV-KST4-EVO2A/6I, PV-KBT4-EVO2A/6I
Per Pallet	36 pieces
Per Container (40' HQ)	720 pieces

* For detailed information, please contact your local Canadian Solar sales and technical representatives.

ELECTRICAL DATA

Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1500 V (IEC/UL)
Module Fire Performance	TYPE 29 (UL 61730) or CLASS C (IEC61730)
Max. Series Fuse Rating	35 A
Protection Class	Class II
Power Tolerance	0 ~ + 10 W
Power Bifaciality*	90 %

* Power Bifaciality = $P_{max_{rear}} / P_{max_{front}}$, both $P_{max_{rear}}$ and $P_{max_{front}}$ are tested under STC, Bifaciality Tolerance: ± 5 %

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.24 % / °C
Temperature Coefficient (Voc)	-0.23 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	41 ± 3°C

PARTNER SECTION

Canadian Solar MSS (Australia) Pty Ltd.

Level 27, 101 Collins Street, Melbourne VIC 3000, Australia, sales.au@csisolar.com, www.csisolar.com/au

September 2025. All rights reserved, PV Module Product Datasheet V1.5_AU

* Manufactured and assembled in China and Thailand.